

QUATRO Series

LUX TYPE DOMESTIC FAN




INTRODUCTION

The present service instruction contains a technical description, technical data sheets, operation and mounting guidelines, safety precautions and warnings for safe and correct operation of the fans Blauberg Ice.


USE

The BLAUBERG Quattro fan is designed for exhaust ventilation of residential and public premises heated during winter season. The fan is designed for wall or ceiling mounting, fig. 3-5. The fan is equipped with a back valve to prevent air back drafting during the fan standby.

TECHNICAL DATA

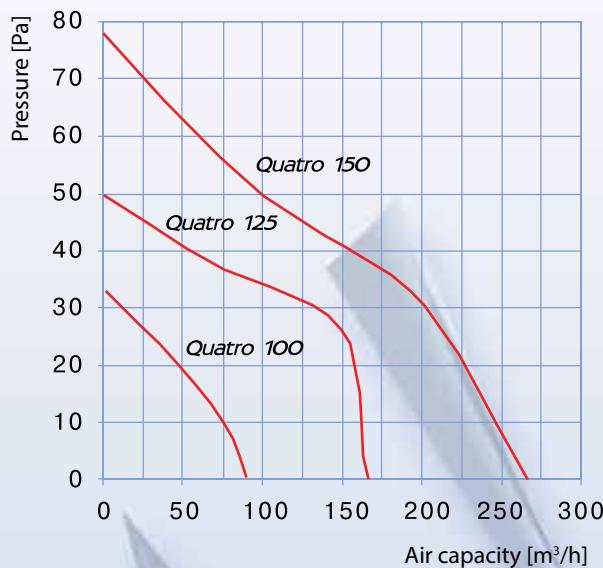


Parameters	Quattro 100	Quattro 125	Quattro 150
Voltage [V]	220-240	220-240	220-240
Power [W]	14	16	24
Air capacity [m³/h]	88	167	265
Sound pressure level at 3 m [dB(A)]	33	34	37
RPM [min⁻¹]	2300	2400	2400

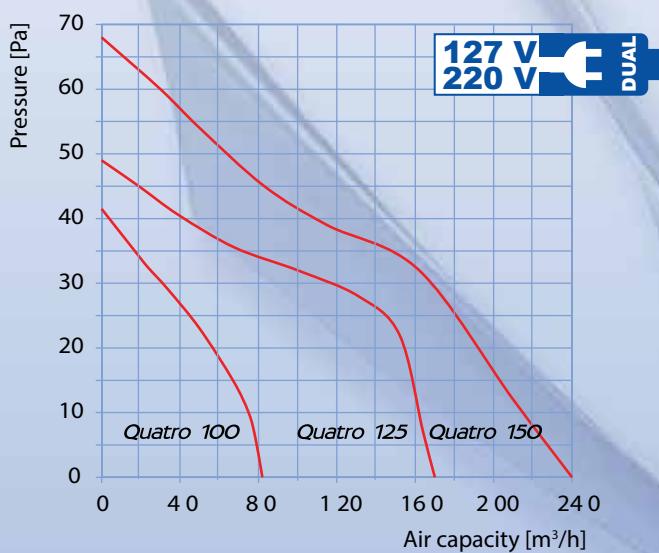

Parameters	Quattro 100 Bivolt		Quattro 125 Bivolt		Quattro 150 Bivolt	
	127	220	127	220	127	220
Voltage [V]	127	220	127	220	127	220
Frequency [Hz]	60	60	60	60	60	60
Power [W]	10	9	16	15	25	25
Current [A]	0.115	0.054	0.119	0.102	0.175	0.338
RPM [min⁻¹]	2500	2500	2400	2400	2350	2350
Air capacity [m³/h]	82	82	170	170	240	240
Sound pressure level at 3 m [dB(A)]	33	33	35	35	37	37
IP	34	34	34	34	34	34

DIMENSIONS

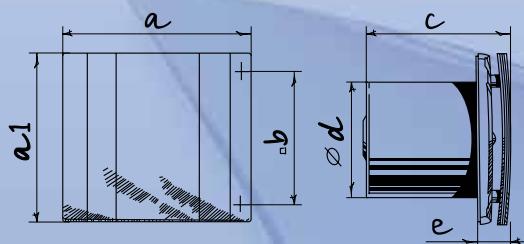

Model	Dimensions [mm]					
	a	a1	b	c	d	e
Quattro 100	171	151	108	128	100	32
Quattro 125	201	178	113	136	125	35
Quattro 150	236	207	165	157	150	38

CERTIFICATES



The fans meet the applicable safety and electromagnetic compatibility standards.

ACCESSORIES

